

# DYNAMIC MICROPHONE

## MH-31A8J

### Technical Supplement

©2005 VERTEX STANDARD CO., LTD.

E068790A


**VERTEX STANDARD CO., LTD.**  
4-8-8 Nakameguro, Meguro-Ku, Tokyo 153-8644, Japan

**VERTEX STANDARD**  
US Headquarters  
10900 Walker Street, Cypress, CA 90630, U.S.A.

**YAESU EUROPE B.V.**  
P.O. Box 75525, 1118 ZN Schiphol, The Netherlands

**YAESU UK LTD.**  
Unit 12, Sun Valley Business Park, Winnall Close  
Winchester, Hampshire, SO23 0LB, U.K.

**VERTEX STANDARD HK LTD.**  
Unit 5, 20/F., Seaview Centre, 139-141 Hoi Bun Road,  
Kwun Tong, Kowloon, Hong Kong

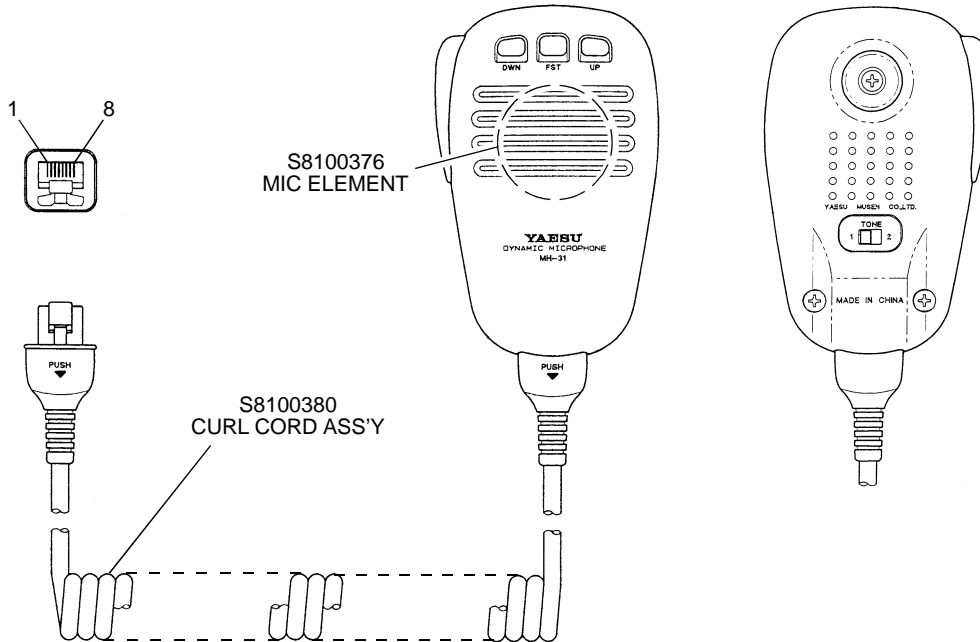

### Specifications

- Microphone Type:** Dynamic
- Microphone Impedance:** 190-ohm  $\pm 30\%$  at 1 kHz (tone 1)
- Microphone Sensitivity:** -78 dB  $\pm 3$  dB at 1 kHz, 0 dB = 1 V / 0.1 Pa (tone 1)
- Audio Tone Response:** tone1, full range  
tone2, -14 dB  $\pm 3$  dB at 100 Hz
- Weight (approx.):** 183 g.

### Circuit Diagram

